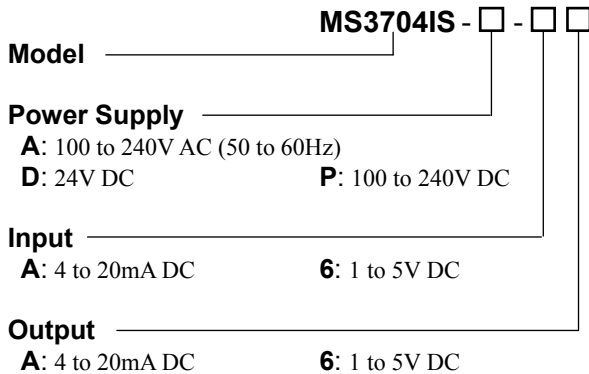
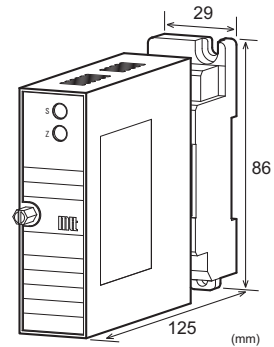


DESCRIPTION

The MS3704IS is a slim, plug-in high-level signal conditioner (isolator) that converts typical standard process signals, i.e. 1 to 5V DC voltage signals or 4 to 20mA DC current signals, into 1 to 5V voltage signals or 4 to 20mA current signals and provides an isolated single output.

ORDERING CODE

ORDERING INFORMATION

To place an order, please use the ordering code format as shown above.
 (e.g.) MS3704IS-A-AA


SPECIFICATIONS
POWER SECTION

Power Requirements	100 to 240V AC: 85 to 264V AC (47 to 63Hz) 24V DC: 24V DC±10% 100 to 240V DC: 85 to 264V DC		
Power Sensitivity	Better than ±0.1% of span for each power supply range.		
Power Line Fuse	160mA fuse is installed (standard).		
Power Consumption	Power	100-240V AC	24V DC
		4.0VA max.	1.2W max.
			100-240V DC
			4.8W max.

INPUT SECTION

Input Resistance	Voltage Input (DC)		With or without power: 1MΩ min.
	Current Input (DC)	4 to 20mA	250Ω
Allowable Input Voltage	Voltage Input		30V DC max., continuous.
	Current Input		40mA DC max., continuous.

OUTPUT SECTION

Maximum Output Load	Voltage Output (DC)		2mA max.
	Current Output (DC)		750Ω max.
Zero Adjustment	Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)		
Span Adjustment	Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)		

PERFORMANCE

Accuracy Rating	Better than ±0.1% of span (at 25°C±5°C).		
Temperature Effect	Better than ±0.2% of span per 10°C change in ambient.		
Response Time	85ms max. (0 to 90%) with a step input at 100%.		
CMRR	100dB min. (500V AC, 50/60Hz)		
Isolation	4-way isolation between input, output, power, and ground.		
Insulation Resistance	100MΩ min. (@ 500V DC) between input, output, power, and ground.		

Dielectric Strength	Input / Output / [Power, Ground]: 2000V AC for 1 minute (Cutoff current: 0.5mA) Power / Ground: 2000V AC for 1 minute (Cutoff current: 5mA)
Surge Withstand Capability	Tested as per ANSI/IEEE C37.90.1-1989.
Operating Environment	Ambient temperature: -5 to 55°C Humidity: 5 to 90% RH (non-condensing)
Storage Temperature	-10 to 60°C

● PHYSICAL

Installation	Wall/DIN rail mounting
Wiring	M3.5 screw terminal connection (with a power terminal block cover & drop-out prevention screws)
Screwing Torque	0.8 to 1.0 [Nm] * Recommended
External Dimensions	W29 × H86 × D125mm (including the mounting screw and socket)
Weight	Main unit: 120g max. Socket: 80g max.

● MATERIALS


Housing	ABS resin (UL 94V-0)
Terminal Block	PBT resin (UL 94V-0)
Terminal Block Cover	PC resin (UL 94V-2)
DIN Rail Stopper	PP resin (UL 94HB)
Screw Terminal	Nickel-plated steel
Contacts Material and Finish	Brass with 0.2μm gold plating
Printed Circuit Board	Glass fabric epoxy resin (FR-4: UL 94V-0)
Anti-Humidity Coating	HumiSeal® 1A27NS (Polyurethane)

* HumiSeal® is a registered trademark of Chase Corporation.

● STANDARDS CONFORMITY

CE Directive Conformity	EMC Directive (2014/30/EU) EN61326-1: 2013 Low Voltage Directive (2014/35/EU) IEC61010-1/EN61010-1: 2010 Installation Category II Pollution Degree 2 Maximum operating voltage 300V Reinforced insulation between [input/output/GND] and power.
-------------------------	--

TERMINAL ASSIGNMENT

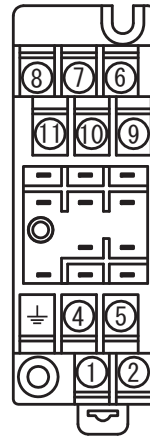

①	P (+)	POWER
②	N (-)	
⊥	GND	
④	+ OUTPUT	
⑤	- OUTPUT	
⑥	N.C.	
⑦	N.C.	
⑧	N.C.	
⑨	+ INPUT	
⑩	- INPUT	
⑪	N.C.	

BLOCK DIAGRAM

