


SERIES 200 & 300 | SOLID PLASTIC STATIONARY GAGES

FEATURES/BENEFITS

- High-accuracy measurement of low range gas and air pressure suitable for laboratory or general industry
- Precision built assures device meets the highest standards
- No moving parts mean no calibration or nothing to wear out
- Over-pressure trap prevents liquid from being expelled from gage, preventing disruption of operation

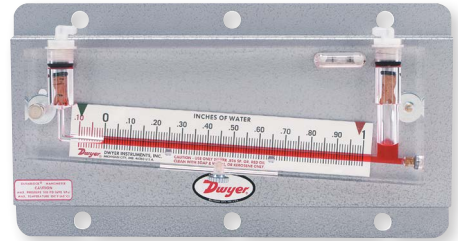

Inclined

APPLICATIONS

- Low pressure laboratory and industrial service applications


DESCRIPTION

Dwyer® **SERIES 200 & 300** solid plastic stationary gages, or draft gages, are offered in inclined and vertical (well-type) styles for highly accurate laboratory or general industrial service, for measurement of low range gas and air pressures, positive, negative, or differential. To assure the accuracy required in instruments of this type, all machining of bores and wells is to the highest standards of precision backed by Dwyer's years of experience in the fabrications of acrylic instruments.




Vertical




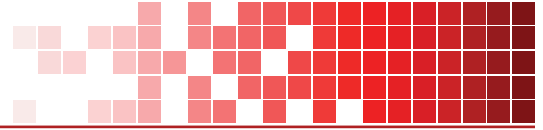

DIMENSIONS

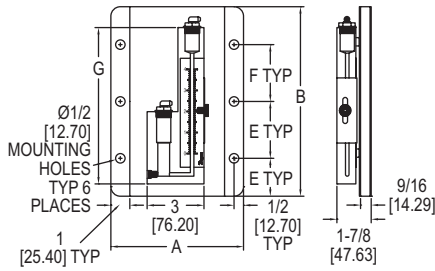

Model	DIM A, in (cm)	DIM B, in (cm)
200.5	11-3/8	11-3/8
201	8-1/4	8-1/4
202.5	12	12
209	11-1/4	11-1/4
215	9-1/2	9-1/2
244	15-5/8	15-5/8
246	22	22

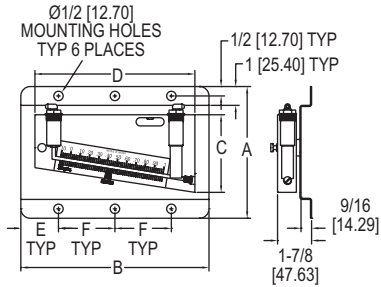

Model	DIM A, in (cm)	DIM B, in (cm)
300	3-11/16	8-1/4
306	4-3/16	10-7/8
308	4-5/8	13-1/16
310	5-5/16	15-1/4

HOW TO ORDER

Use the **bold** characters from the chart below to construct a product code.

XYZ **-X**

MANOMETER TYPE

INCLINED

- 200.5** - 0.1-0-1 in w.c.
- 201** - .05-0.5 in w.c.
- 202.5** - 0.2-0-2 in w.c.
- 209** - 0.2-0-3 in w.c.
- 215** - 0.05-0-0.25 in w.c.
- 244** - 0-4 in w.c.
- 246** - 0-6 in w.c.
- M200** - 3-0-25 mm w.c.
- M200.5** - 3-0-25 mm w.c.
- M201** - 0-15 mm w.c.
- M202** - 5-0-50 mm w.c.
- M202.5** - 5-0-50 mm w.c.
- M209** - 5-0-75 mm w.c.
- M215** - 2-0-6 mm w.c.
- M246** - 0-150 mm w.c.

VERTICAL

- 300** - 0-4 in w.c.
- 306** - 0-6 in w.c.
- 308** - 0-8 in w.c.
- 310** - 0-10 in w.c.
- M300** - 0-11 cm w.c.
- M306** - 0-16.4 cm w.c.
- M308** - 0-21.6 cm w.c.
- M310** - 0-25 cm w.c.

OPTIONS

- B** - Type B connections
- C** - Type C connections
- D** - Type D connections
- E** - Type E connections
- AT** - Aluminum Tag
- NIST** - NIST calibration

ACCESSORIES

Model	Description
A-101	1 oz dispenser bottle of red gage fluid, .826 sp. gr.
A-315	Gage connector, shutoff type, for 3/16" rubber tubing.
A339	Adapter, brass, 1/8" NPT to 3/16" rubber and 1/8" ID plastic tubing.

Important Notice: Dwyer Instruments, Inc. reserves the right to make changes to or discontinue any product or service identified in this publication without notice. Dwyer advises its customers to obtain the latest version of the relevant information to verify, before placing any orders, that the information being relied upon is current.

