


Dwyer

SERIES SG5

CONTRACTOR GAGE

Large, Easy-to-Read Dial, Internal Surge Suppressor

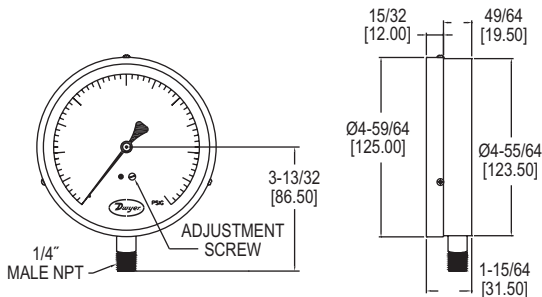

The **Series SG5 Contractor Gage** is ideally manufactured for contractors because of their large dial and compact design. Since the gages are lightweight and slim, they are easy to transport. The large 4.5" scale makes them simple to read. The Series SG5 gages possess psi scales with 1% full-scale accuracy. The gages are made with a stainless steel housing and brass wetted parts. Units can withstand temperatures of -4 to 140°F (-20 to 60°C). These qualities make the SG5 series perfect for contractors and industrial applications. A wide offering of ranges are available from full vacuum to 300 psi.

FEATURES/BENEFITS

- Stainless steel housing resists ambient corrosion for longer service life in harsh environments
- High accuracy gage for applications requiring more precise measurement
- Lightweight and slim, yet large easy to read gage make them easy to carry and read
- Specified with high ambient temperature rating means more robust uses and longer service-life

APPLICATIONS

- Contractor applications
- Industrial applications

OPTIONS

Use order code:	Description
NISTCAL-PG1	NIST traceable calibration certificate

SPECIFICATIONS

Service: Compatible gases and liquids.

Wetted Materials: Brass connection, bronze tube.

Housing: 304 SS.

Lens: Plastic.

Accuracy: ±1% FS.

Pressure Limits: Full scale range.

Temperature Limits: -4 to 140°F (-20 to 60°C).

Size: 4.5" (115 mm).

Process Connections: 1/4" male NPT.

Weight: 10.4 oz (295 g).

MODEL CHART

Model	Range
SG5-G0122N	30" Hg to 0
SG5-G0322N	0 to 30 psi
SG5-G0422N	0 to 60 psi
SG5-G0522N	0 to 100 psi
SG5-G0622N	0 to 160 psi
SG5-G0722N	0 to 200 psi
SG5-G0822N	0 to 300 psi

USA: California Proposition 65

⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov